

# **Mannering Colliery**

## **Monthly attended noise monitoring - April 2023**

---

Prepared for Great Southern Energy Pty Ltd (trading as Delta Coal)

April 2023

# Mannering Colliery

## Monthly attended noise monitoring - April 2023

Great Southern Energy Pty Ltd (trading as Delta Coal)

E220750 RP1

April 2023

Version	Date	Prepared by	Reviewed by	Comments
2	24 April 2023	Teanuanua Villierme	Tony Welbourne	

Approved by



**Tony Welbourne**

Associate Director

24 April 2023

Level 3 175 Scott Street  
Newcastle NSW 2300

This report has been prepared in accordance with the brief provided by Great Southern Energy Pty Ltd (trading as Delta Coal) and, in its preparation, EMM has relied upon the information collected at the times and under the conditions specified in this report. All findings, conclusions or recommendations contained in this report are based on those aforementioned circumstances. The contents of this report are private and confidential. This report is only for Great Southern Energy Pty Ltd (trading as Delta Coal)'s use in accordance with its agreement with EMM and is not to be relied on by or made available to any other party without EMM's prior written consent. Except as permitted by the *Copyright Act 1968* (Cth) and only to the extent incapable of exclusion, any other use (including use or reproduction of this report for resale or other commercial purposes) is prohibited without EMM's prior written consent. Except where expressly agreed to by EMM in writing, and to the extent permitted by law, EMM will have no liability (and assumes no duty of care) to any person in relation to this document, other than to Great Southern Energy Pty Ltd (trading as Delta Coal) (and subject to the terms of EMM's agreement with Great Southern Energy Pty Ltd (trading as Delta Coal)).

© EMM Consulting Pty Ltd, Ground Floor Suite 01, 20 Chandos Street, St Leonards NSW 2065, April 2023.

# TABLE OF CONTENTS

---

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Background	1
1.2	Attended monitoring locations	1
1.3	Terminology and abbreviations	3
<b>2</b>	<b>Noise limits</b>	<b>5</b>
2.1	Project approval	5
2.2	Environment protection licence	5
2.3	Noise management plan	5
2.4	Noise limits	5
2.5	Meteorological conditions	5
2.6	Additional requirements	6
<b>3</b>	<b>Methodology</b>	<b>7</b>
3.1	Overview	7
3.2	Attended noise monitoring	7
3.3	Meteorological data	7
3.4	Modifying factors	8
3.5	Instrumentation	8
<b>4</b>	<b>Results</b>	<b>9</b>
4.1	Total measured noise levels and atmospheric conditions	9
4.2	Site only noise levels	9
<b>5</b>	<b>Discussion</b>	<b>12</b>
5.1	Noted noise sources	12
5.2	RA1 – Evening	13
5.3	RA3 – Evening	14
5.4	RA2 – Evening	15
5.5	RA1 – Night	16
5.6	RA3 – Night	17
5.7	RA2 – Night	18
<b>6</b>	<b>Summary</b>	<b>19</b>

## Appendices

Appendix A	Noise perception and examples	A.1
Appendix B	Regulator documents	B.1

Appendix C	Calibration certificates	C.1
<b>Tables</b>		
Table 1.1	Attended noise monitoring locations	1
Table 1.2	Terminology and abbreviations	3
Table 2.1	Noise impact limits, dB	5
Table 3.1	Attended noise monitoring equipment	8
Table 4.1	Total measured noise levels <sup>1</sup> – April 2023	9
Table 4.2	Atmospheric conditions measured at microphone height – April 2023	9
Table 4.3	Site noise levels and limits – April 2023	11
Table A.1	Perceived change in noise	A.2
<b>Figures</b>		
Figure 1.1	Attended noise monitoring locations	2
Figure 5.1	Example graph (refer to Section 5.1 for explanatory note)	12
Figure 5.2	Environmental Noise Levels – RA1, Pacific Highway	13
Figure 5.3	Environmental Noise Levels – RA3, Kingfisher Shores	14
Figure 5.4	Environmental Noise Levels – RA2, Macquarie Shores	15
Figure 5.5	Environmental Noise Levels – RA1, Pacific Highway	16
Figure 5.6	Environmental Noise Levels – RA3, Kingfisher Shores	17
Figure 5.7	Environmental Noise Levels – RA2, Macquarie Shores	18
Figure A.1	Common noise levels	A.2

# 1 Introduction

## 1.1 Background

EMM Consulting Pty Ltd (EMM) was engaged by Great Southern Energy Pty Ltd (trading as Delta Coal) to conduct a monthly noise survey of operations at Mannering Colliery (MC, the site) located at Ruttleys Road, Doyalson North NSW. The survey purpose was to quantify the acoustic environment and compare site noise levels against specified limits.

Attended environmental noise monitoring described in this report was done during the evening and night periods of Tuesday 18 April 2023 at three monitoring locations.


## 1.2 Attended monitoring locations

Site monitoring locations are detailed in Table 1.1 and shown on Figure 1.1. It should be noted that Figure 1.1 shows actual monitoring positions, not necessarily the location of residences.

**Table 1.1**      **Attended noise monitoring locations**

Location descriptor/ID	Description/address	Coordinates (MGA56)	
		Easting	Northing
RA1	Pacific Highway, Doyalson North	364646	6327221
RA2	Macquarie Shores Home Village, Doyalson North	365164	6328332
RA3	Tall Timbers Road (northern end), Kingfisher Shores	365069	6328953



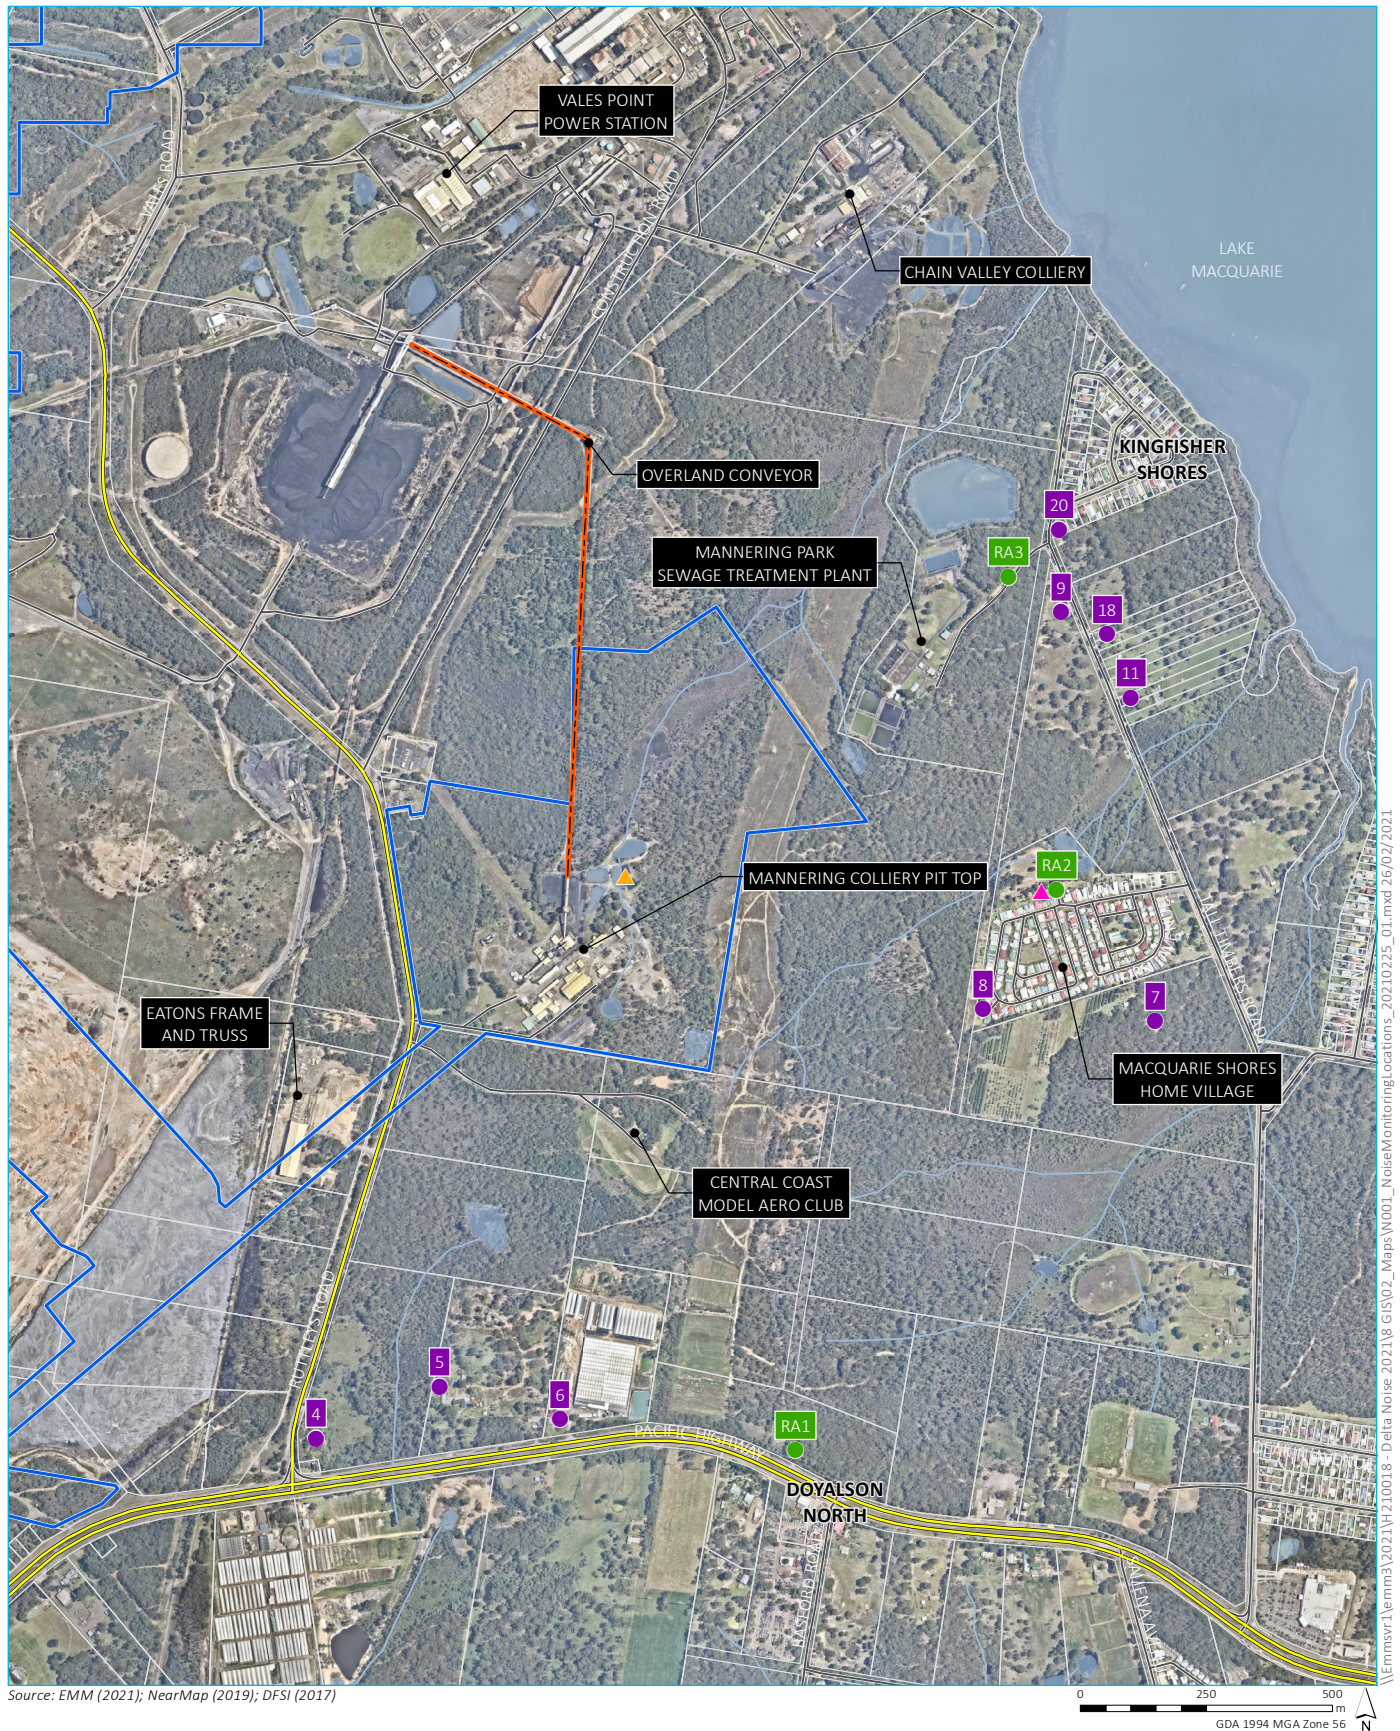

## KEY

- ▮ Manning Colliery project approval boundary
- Alignment of overland conveyor to VPPS
- Main road
- Local road
- Watercourse/drainage line
- ▭ Waterbody
- ▭ Cadastral boundary

- Assessment location
- Attended monitoring location
- ▲ Continuous monitoring location
- ▲ Meteorological station

Attended noise monitoring  
and assessment locations

Manning Colliery  
Figure 1.1



### 1.3 Terminology and abbreviations

Some definitions of terms and abbreviations which may be used in this report are provided in Table 1.2.

**Table 1.2** Terminology and abbreviations

Term/descriptor	Definition
dB(A)	Noise level measurement units are decibels (dB). The “A” weighting scale is used to approximate how humans hear noise.
L <sub>Amax</sub>	The maximum root mean squared A-weighted noise level over a time period.
L <sub>A1</sub>	The A-weighted noise level which is exceeded for 1 per cent of the time.
LA1,1minute	The A-weighted noise level which is exceeded for 1 per cent of the specified time period of 1 minute.
LA10	The A-weighted noise level which is exceeded for 10 percent of the time.
LAeq	The energy average A-weighted noise level.
LAeq,15minute	The energy average A-weighted noise level over the specified time period of 15 minutes.
LA50	The A-weighted noise level which is exceeded for 50 per cent of the time, also the median noise level during a measurement period.
LA90	The A-weighted noise level exceeded for 90 percent of the time, also referred to as the “background” noise level and commonly used to derive noise limits.
L <sub>Amin</sub>	The minimum A-weighted noise level over a time period.
L <sub>Ceq</sub>	The energy average C-weighted noise energy during a measurement period. The “C” weighting scale is used to take into account low-frequency components of noise within the audibility range of humans.
SPL	Sound pressure level. Fluctuations in pressure measured as 10 times a logarithmic scale, with the reference pressure being 20 micropascals.
Hertz (Hz)	The frequency of fluctuations in pressure, measured in cycles per second. Most sounds are a combination of many frequencies together.
AWS	Automatic weather station used to collect meteorological data, typically at an altitude of 10 metres
VTG	Vertical temperature gradient in degrees Celsius per 100 metres altitude.
Sigma-theta	The standard deviation of the horizontal wind direction over a period of time.
IA	Inaudible. When site noise is noted as IA then there was no site noise at the monitoring location.
NM	Not Measurable. If site noise is noted as NM, this means some noise was audible but could not be quantified.
Day	Monday – Saturday: 7 am to 6 pm, on Sundays and Public Holidays: 8 am to 6 pm.
Evening	Monday – Saturday: 6 pm to 10 pm, on Sundays and Public Holidays: 6 pm to 10 pm.
Night	Monday – Saturday: 10 pm to 7 am, on Sundays and Public Holidays: 10 pm to 8 am.
NPfi	NSW EPA Noise Policy for Industry (2017)
Standard meteorological conditions	Stability categories A-D with wind speed up to 0.5 m/s at 10 m above ground level during the day, evening, or night period, as defined in Table D1 of the NPfi.

**Table 1.2**      **Terminology and abbreviations**

Term/descriptor	Definition
Noise-enhancing meteorological conditions	Stability categories A-D with wind speed up to 3 m/s at 10 m above ground level during the day, evening, or night period, or stability category F with wind speed up to 2 m/s at 10 m above ground level during the night period, as defined in Table D1 of the NPfl. This does not necessarily imply that meteorological conditions were enhancing site noise at the monitoring location.
Very noise-enhancing meteorological conditions	Meteorological conditions outside of the range of either standard or noise-enhancing meteorological conditions, as defined in the NPfl. This does not necessarily imply that meteorological conditions were enhancing site noise at the monitoring location.
Temperature inversion	A meteorological condition where the atmospheric temperature increases with altitude.

Appendix A provides further information that gives an indication as to how an average person perceives changes in noise level, and examples of common noise levels.



## 2 Noise limits

### 2.1 Project approval

Manning Colliery noise limits are provided in Table 1, Condition 2 of Schedule 3 of the project approval (PA) PA MP06\_0311. Relevant sections of the project approval are reproduced in Appendix B.1.

### 2.2 Environment protection licence

Environment Protection Licence 191 (EPL) references the PA with respect to noise limits. Relevant sections of the EPL are reproduced in Appendix B.2.

### 2.3 Noise management plan

The approved Noise Management Plan (NMP) was prepared in line with the Mod 5 approval and in accordance with the NPfI. Three attended noise monitoring locations representative of the PA noise assessment locations have been adopted in the NMP for the purpose of determining compliance with relevant noise limits. Relevant sections of the NMP are reproduced in Appendix B.3.

### 2.4 Noise limits

Noise impact limits based on the NMP are as shown in Table 2.1.

**Table 2.1 Noise impact limits, dB**

Location	Day $L_{Aeq,15minute}$	Evening $L_{Aeq,15minute}$	Night $L_{Aeq,15minute}$	Night $L_{A1,1minute}$
RA1	40	36	36	46
RA2	40	40	40	45
RA3	40	39	39	49

### 2.5 Meteorological conditions

The PA (Mod 5) states the following:

Noise generated by the development must be monitored and measured in accordance with the relevant procedures and exemptions (including certain meteorological conditions) of the NSW Noise Policy for Industry (EPA, 2017).

Section 5.2 of the NPfI states that noise limits applicable under 'very noise-enhancing' conditions should be the limits that apply under 'standard' or 'noise-enhancing' conditions plus 5 dB. This implies that there will be no periods when noise limits do not apply due to meteorological conditions. Refer to Table 1.2 for the definition of 'standard', 'noise-enhancing' and 'very noise-enhancing' meteorological conditions.

As per the PA (Mod 5) and NMP, and in accordance with the NPfI, this assessment has adopted a +5 dB adjustment to the limits shown in Table 2.1 when monitoring is undertaken during the following 'very noise-enhancing' conditions:

- wind speeds greater than 3 m/s at 10 m above ground level;

- stability category F temperature inversion conditions with wind speeds greater than 2 m/s at 10 m above ground level; or
- stability category G temperature inversion conditions.

When monitoring has been undertaken during 'very noise-enhancing' conditions and a +5 dB adjustment to the limits has been adopted, this is indicated in Table 4.3.

## 2.6 Additional requirements

Monitoring and reporting have been done in accordance with the NPfI issued in October 2017 and the 'Approved methods for the measurement and analysis of environmental noise in NSW' (Approved Methods) issued in January 2022.

## 3 Methodology

### 3.1 Overview

Attended environmental noise monitoring was done in general accordance with Australian Standard AS1055 'Acoustics, Description and Measurement of Environmental Noise' and relevant EPA requirements.

Meteorological data was obtained from the Mannering Colliery on-site automatic weather station (AWS) which allowed correlation of atmospheric parameters with measured noise levels.

### 3.2 Attended noise monitoring

During this survey, attended noise monitoring was conducted during the evening and night periods at each location. The duration of each measurement was 15 minutes. Atmospheric conditions were measured at each monitoring location.

Measured sound levels from various sources were noted during each measurement, and particular attention was paid to the extent of site's contribution (if any) to measured levels. At each monitoring location, the site-only  $L_{Aeq,15minute}$  and  $L_{Amax}$  were measured directly or determined by other methods detailed in Section 7.1 of the NPfI.

If the exact noise levels from site could not be established due to masking by other noise sources in a similar frequency range, but was determined to be at least 5 dB lower than relevant limits, then a maximum estimate of it may be provided. This is expressed as a 'less than' quantity, such as <20 dB or <30 dB.

The terms 'Inaudible' (IA) or 'Not Measurable' (NM) are often used in noise survey reports. When site noise is noted as IA, it was inaudible at the monitoring location. When site noise is noted as NM, this means it was audible but could not be quantified. All results noted as NM in survey reports are due to one or more of the following:

- Site noise levels were extremely low and unlikely, in many cases, to be noticed.
- Site noise levels were masked by other more dominant noise sources that are characteristic of the environment, such as breeze in foliage or continuous road traffic noise, that cannot be eliminated by monitoring at an alternate or intermediate location.
- It was not feasible or reasonable to employ methods such as move closer and back calculate. Cases may include rough terrain preventing closer measurement, addition/removal of significant source to receiver shielding caused by moving closer, and meteorological conditions where back calculation may not be accurate.

For this assessment, the measured  $L_{Amax}$  has been used as a conservative estimate of  $L_{A1,1minute}$ . The EPA accepts sleep disturbance analysis based on either the  $L_{A1,1minute}$  or  $L_{Amax}$  metrics, with the  $L_{Amax}$  representing a more conservative assessment of site noise emissions.

### 3.3 Meteorological data

This assessment determined stability categories throughout attended monitoring period using the sigma-theta method as per Fact Sheet D of the NPfI (EPA 2017). This data was sourced from the site's AWS, in accordance with PA requirements.



### 3.4 Modifying factors

All measurements were evaluated for potential modifying factors in accordance with the NPfI. Assessment of modifying factors is undertaken at the time of measurement if the site was audible and directly quantifiable. If applicable, modifying factor adjustments have been reported and added to measured site-only  $L_{Aeq}$  noise levels.

Low-frequency modifying factor adjustments have only been applied to site-only  $L_{Aeq}$  levels if the site was the only contributing low-frequency noise source. Specific methodology for assessment of each modifying factor is outlined in Fact Sheet C of the NPfI.

### 3.5 Instrumentation

Equipment used to measure environmental noise levels is detailed in Table 3.1. Calibration certificates are provided in Appendix C.

**Table 3.1**      **Attended noise monitoring equipment**

Item	Serial number	Calibration due date	Relevant standard
Brüel & Kjær 2250 sound level meter	2759405	2/2/2024	IEC 61672-1:2002
Svantek SV-36 calibrator	79952	29/9/2024	IEC 60942

## 4 Results

### 4.1 Total measured noise levels and atmospheric conditions

Overall noise levels measured at each location during attended measurements are provided in Table 4.1.

**Table 4.1** Total measured noise levels<sup>1</sup> – April 2023

Location	Start date and time	L <sub>Amax</sub> dB	L <sub>A1</sub> dB	L <sub>A10</sub> dB	L <sub>Aeq</sub> dB	L <sub>A50</sub> dB	L <sub>A90</sub> dB	L <sub>Amin</sub> dB
RA1	18/04/2023 20:48	74	65	62	58	55	46	40
RA3	18/04/2023 21:11	59	41	40	39	39	38	37
RA2	18/04/2023 21:30	43	40	39	38	38	37	36
RA1	18/04/2023 22:00	68	62	59	55	50	42	36
RA3	18/04/2023 22:21	74	57	43	48	41	40	38
RA2	18/04/2023 22:45	62	42	41	40	40	39	37

Notes: 1. Levels in this table are not necessarily the result of activity at site.

Atmospheric conditions data measured by the operator during each measurement using a hand-held weather meter is shown in Table 4.2. Wind speed, direction and temperature were measured at approximately 1.5 metres from the ground. Attended noise monitoring is not done during rain, hail, or wind speeds above 5 m/s at microphone height.

**Table 4.2** Atmospheric conditions measured at microphone height – April 2023

Location	Start date and time	Temperature °C	Wind speed m/s	Wind direction ° Magnetic north <sup>1</sup>	Cloud cover 1/8s
RA1	18/04/2023 20:48	16	<0.5	-	1
RA3	18/04/2023 21:11	15	<0.5	-	1
RA2	18/04/2023 21:30	13	<0.5	-	2
RA1	18/04/2023 22:00	15	<0.5	-	1
RA3	18/04/2023 22:21	15	<0.5	-	0
RA2	18/04/2023 22:45	13	<0.5	-	2

Notes: 1. “-” indicates calm conditions at monitoring location.

### 4.2 Site only noise levels

#### 4.2.1 Modifying factors

There were no modifying factors, as defined in the NPfI, applicable during the survey.

### 4.2.2 Monitoring results

Table 4.3 provides site noise levels in the absence of other sources, where possible, and includes weather data from the site AWS. Noise limits are applicable under all weather conditions but are adjusted during very noise-enhancing weather conditions as defined by the NPfl (refer to Section 2.5).



**Table 4.3**      **Site noise levels and limits – April 2023**

Location	Start date and time	Wind		Stability class	Standard limits apply? <sup>1</sup>	Limit, dB		Site level, dB <sup>2</sup>		Exceedance, dB	
		Speed m/s	Direction			L <sub>Aeq,15minute</sub>	L <sub>Amax</sub>	L <sub>Aeq,15minute</sub>	L <sub>Amax</sub>	L <sub>Aeq,15minute</sub>	L <sub>Amax</sub>
RA1	18/04/2023 20:48	0.7	250	D	Yes	36	N/A	IA	N/A	Nil	N/A
RA3	18/04/2023 21:11	0.7	246	E	Yes	39	N/A	IA	N/A	Nil	N/A
RA2	18/04/2023 21:30	0.6	231	F	Yes	40	N/A	IA	N/A	Nil	N/A
RA1	18/04/2023 22:00	0.4	309	F	Yes	36	46	IA	IA	Nil	Nil
RA3	18/04/2023 22:21	0.3	161	F	Yes	39	49	IA	IA	Nil	Nil
RA2	18/04/2023 22:45	0.6	233	F	Yes	40	45	<37	40	Nil	Nil


Notes:    1. If no, adjusted noise limits (standard limit + 5 dB) apply during 'very noise-enhancing' meteorological conditions as stated in Section 2.5.  
              2. Site-only L<sub>Aeq,15minute</sub>, includes modifying factor adjustments if applicable.

## 5 Discussion

### 5.1 Noted noise sources


During attended monitoring, the time variations (temporal characteristics) of noise sources are considered in each measurement via statistical descriptors. From these observations, summaries have been derived for the location and provided in this chapter. Statistical 1/3 octave-band analysis of environmental noise was undertaken and the following figures display frequency ranges of various noise sources at each location for  $L_{A1}$ ,  $L_{A10}$ ,  $L_{Aeq}$ ,  $L_{A50}$ , and  $L_{A90}$  descriptors. These figures also provide, graphically, statistical information for these noise levels.

An example is provided as Figure 5.1, where frogs and insects are seen to be generating noise at frequencies above 1000 Hz, while industrial noise is observed at frequencies less than 1000 Hz.

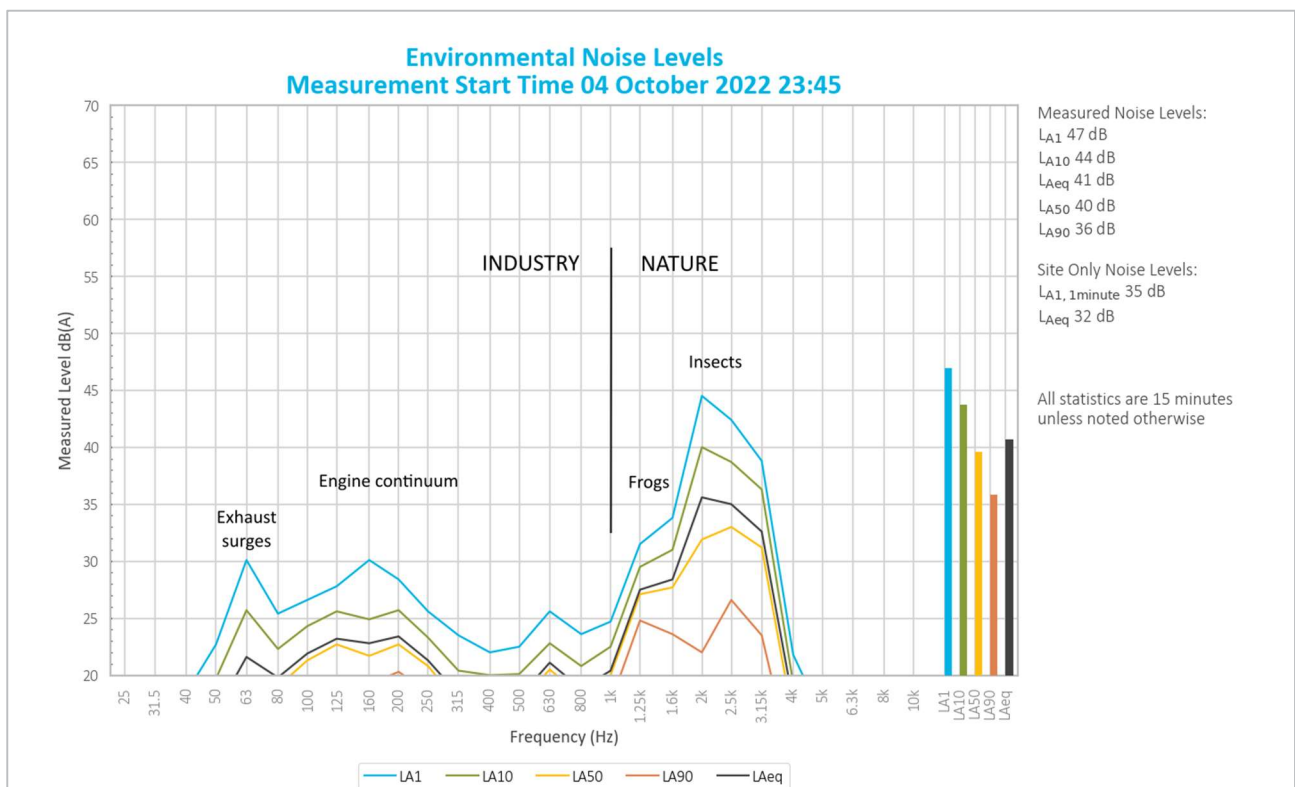

**Figure 5.1** Example graph (refer to Section 5.1 for explanatory note)

## 5.2 RA1 – Evening

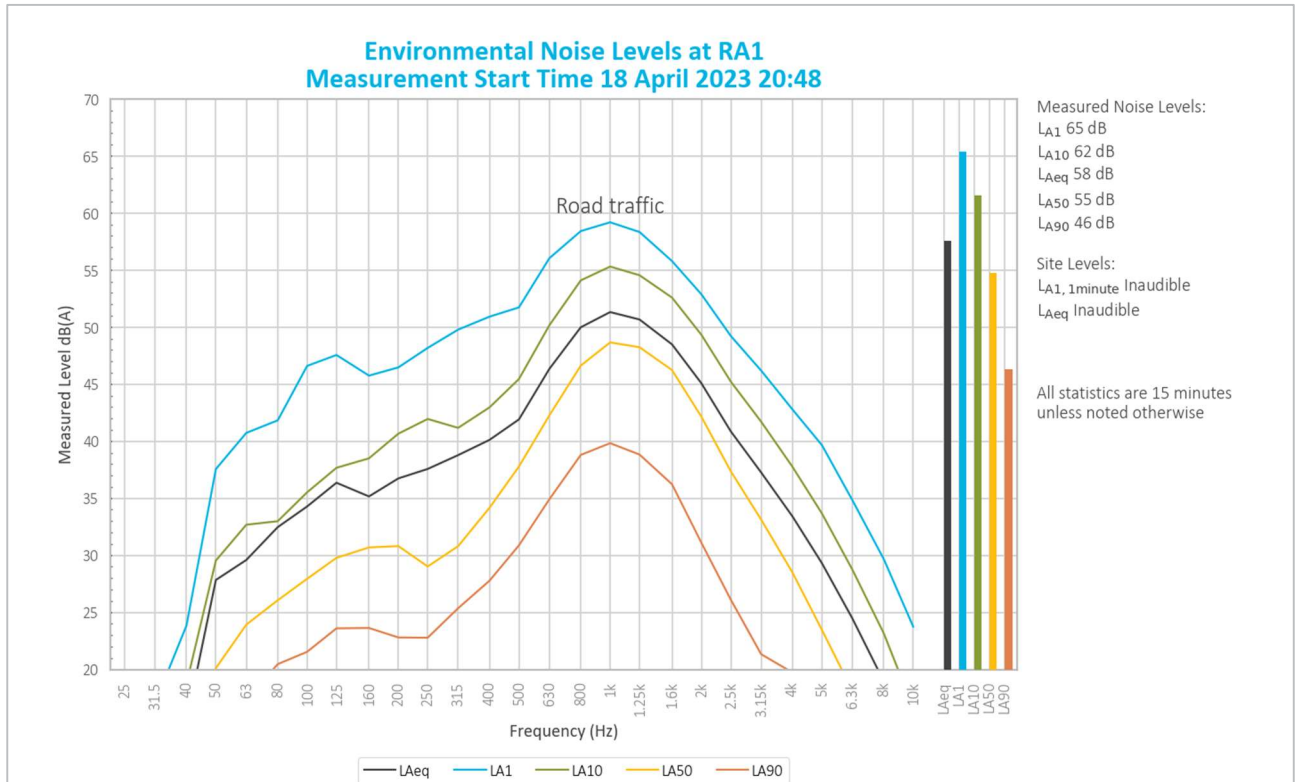


**Figure 5.2 Environmental Noise Levels – RA1, Pacific Highway**

Manning Colliery operations were inaudible during the entire measurement.

Road traffic noise generated all measured levels.



### 5.3 RA3 – Evening

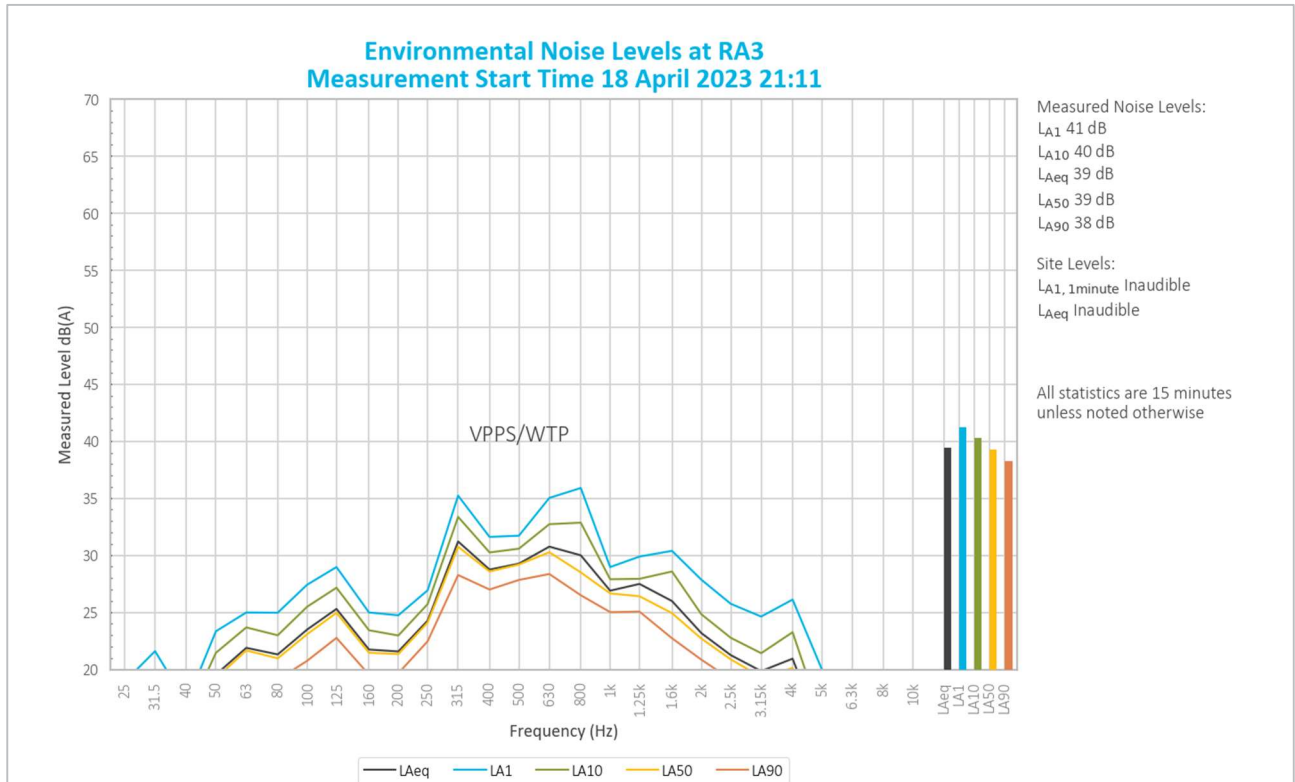


**Figure 5.3 Environmental Noise Levels – RA3, Kingfisher Shores**

Manning Colliery operations were inaudible during the entire measurement.

Vales Point Power Station (VPPS) hum was primarily responsible for the measured  $L_{A1}$ ,  $L_{A10}$  and  $L_{Aeq}$ . VPPS hum and noise (pumps) from the nearby water treatment plant (WTP) contributed to the measured  $L_{A50}$  and  $L_{A90}$ .

5.4 RA2 – Evening

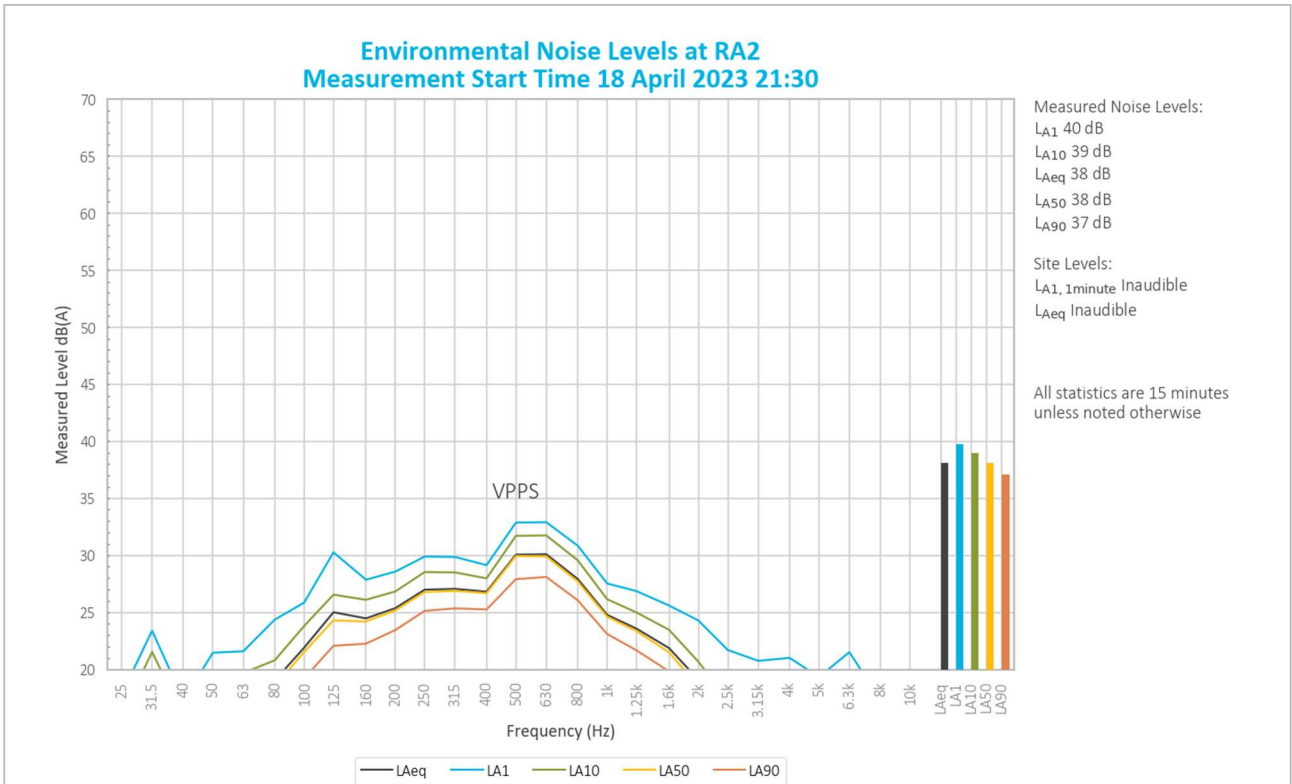


**Figure 5.4 Environmental Noise Levels – RA2, Macquarie Shores**

Mannering Colliery operations were inaudible during the entire measurement.

VPPS hum was primarily responsible for all measured levels.

## 5.5 RA1 – Night

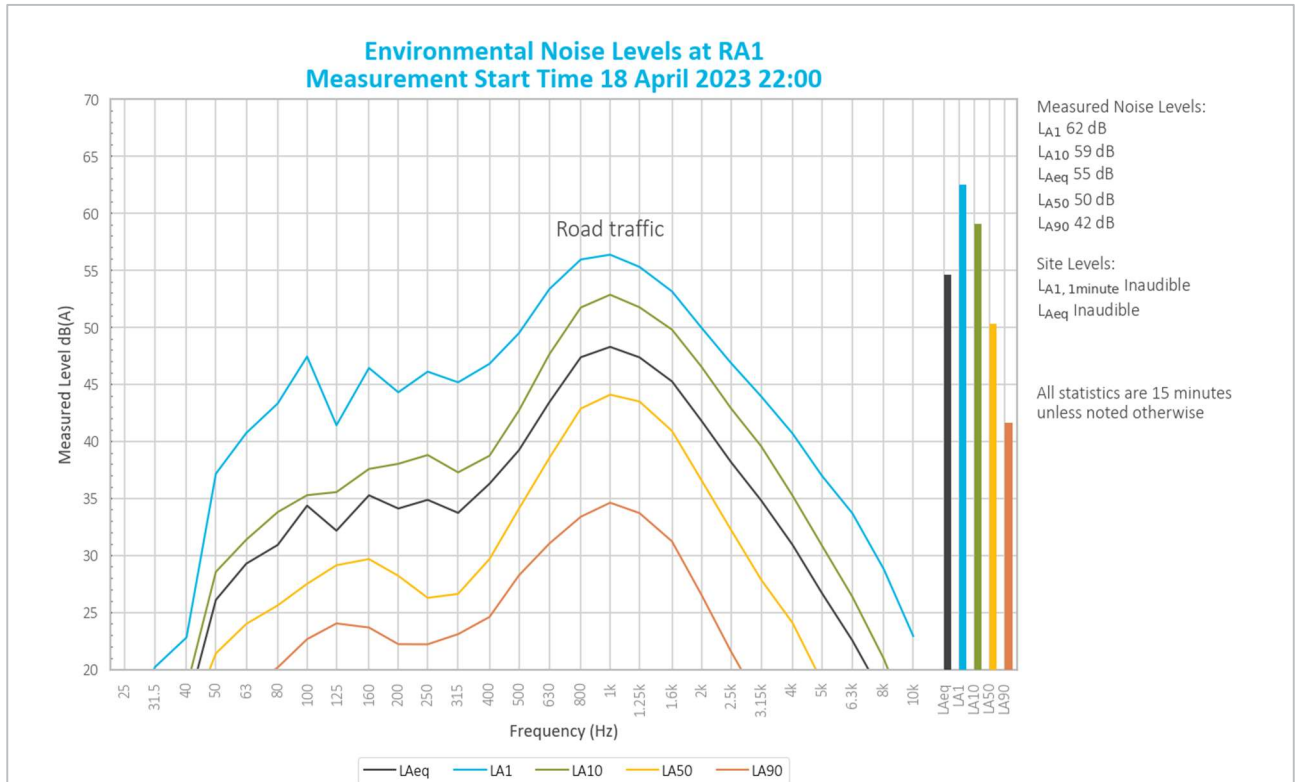


**Figure 5.5 Environmental Noise Levels – RA1, Pacific Highway**

Manning Colliery operations were inaudible during the entire measurement.

Road traffic noise generated all measured levels.



## 5.6 RA3 – Night

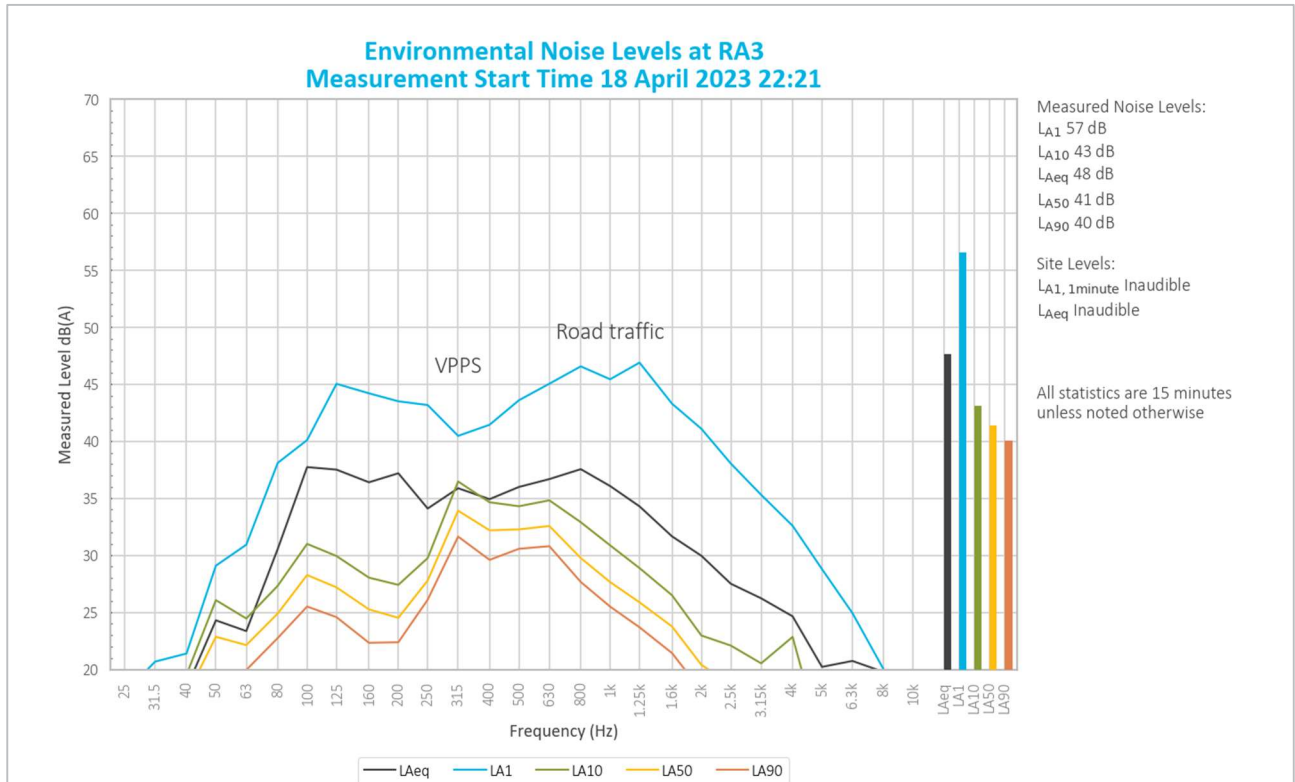


**Figure 5.6 Environmental Noise Levels – RA3, Kingfisher Shores**

Manning Colliery operations were inaudible during the entire measurement.

VPPS hum contributed to the measured  $L_{A50}$  and  $L_{A90}$ . Road traffic noise (car passby) was primarily responsible for the measured  $L_{A1}$ ,  $L_{A10}$  and  $L_{Aeq}$ .

## 5.7 RA2 – Night

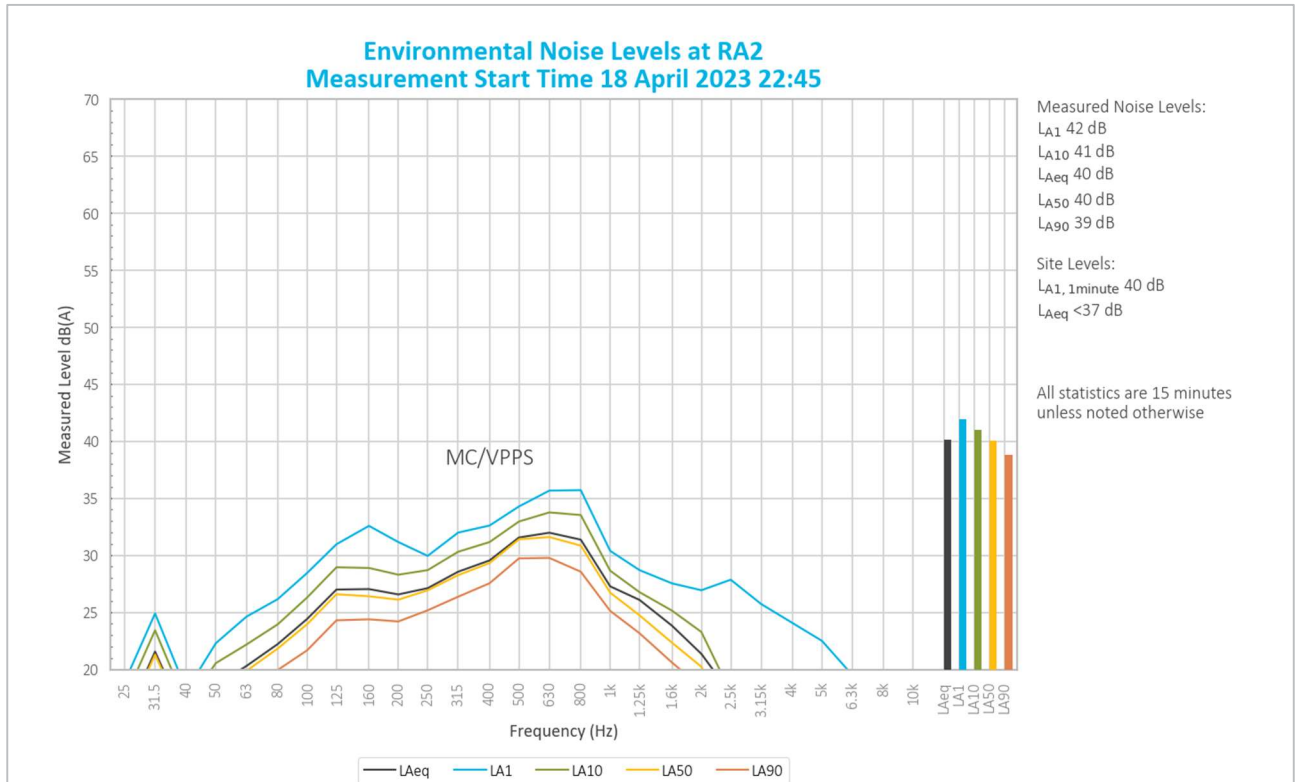

**Figure 5.7 Environmental Noise Levels – RA2, Macquarie Shores**

Mannering Colliery CHPP hum was audible during most of the measurement, generating a site-only  $L_{Aeq,15 \text{ minute}}$  of <37 dB. Mannering Colliery CHPP hum was also responsible for the site-only  $L_{A1,1 \text{ minute}}$  of 40 dB.

VPPS hum also contributed to all measured levels.

## 6 Summary

EMM Consulting Pty Ltd (EMM) was engaged by Great Southern Energy Pty Ltd (trading as Delta Coal) to conduct a monthly noise survey of operations at the site. The survey purpose was to quantify the acoustic environment and compare site noise levels against specified noise limits.

Attended environmental noise monitoring described in this report was done during the evening and night periods of Tuesday 18 April 2023 at three monitoring locations.

Noise levels from site complied with relevant limits at all monitoring locations during the April 2023 survey.

---

# Appendix A

## Noise perception and examples


---

## A.1 Noise levels

Table A.1 gives an indication as to how an average person perceives changes in noise level. Examples of common noise levels are provided in Figure A.1.

**Table A.1** Perceived change in noise

Change in sound pressure level (dB)	Perceived change in noise
up to 2	Not perceptible
3	Just perceptible
5	Noticeable difference
10	Twice (or half) as loud
15	Large change
20	Four times (or quarter) as loud

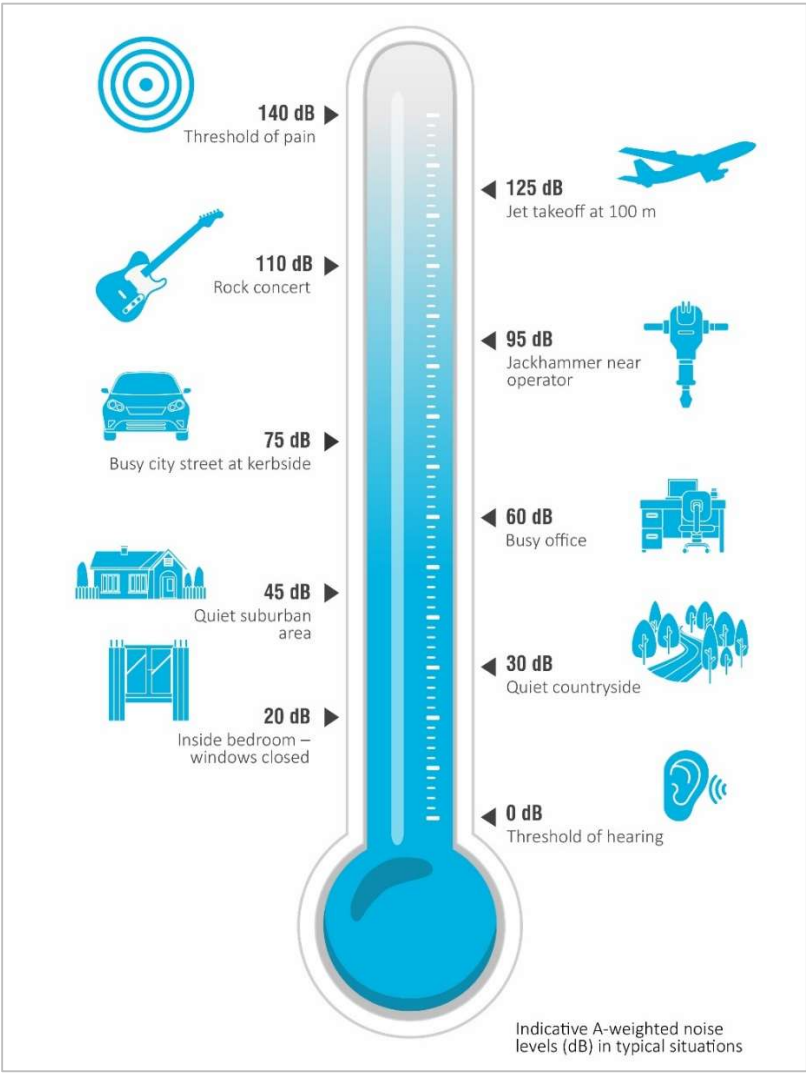

**Figure A.1** Common noise levels

---

# Appendix B

## Regulator documents

---



## SCHEDULE 3 SPECIFIC ENVIRONMENTAL CONDITIONS

### NOISE

#### Construction Noise

1. The Applicant must ensure that the noise generated by any construction work is managed in accordance with the requirements outlined in the *Interim Construction Noise Guideline* (DECC, 2009).

#### Operational Noise Criteria

2. Except for the carrying out of construction works, the Applicant must ensure that the noise generated by the development does not exceed the criteria in Table 1 at any residence<sup>a</sup> on privately-owned land.

**Table 1:** Operational noise criteria dB(A)

Noise Assessment Location	Day <i>L<sub>Aeq</sub></i> (15 min)	Evening <i>L<sub>Aeq</sub></i> (15 min)	Night <i>L<sub>Aeq</sub></i> (15 min)	Night <i>L<sub>A1</sub></i> (1 min)
4 – di Rocco	40	36	36	46
5 - Keighran	40	39	39	49
6 – Swan	40	37	37	47
7 – Druitt	40	35	35	45
8 – Macquarie Shores Home Village	42	42	42	47
9 - Jeans	40	37	37	47
11 - Jeans	40	36	36	46
18 - Jeans	40	36	36	46
20 – Knight and all other privately-owned residences	40	36	36	46

<sup>a</sup> The Noise Assessment Locations referred to in Table 1 are shown in Appendix 4.

Noise generated by the development must be monitored and measured in accordance with the relevant procedures and exemptions (including certain meteorological conditions) of the *NSW Noise Policy for Industry* (EPA, 2017).

3. The noise criteria in Table 1 do not apply if the Applicant has an agreement with the owner/s of the relevant residence or land to exceed the noise criteria, and the Applicant has advised the Department in writing of the terms of this agreement.

#### Noise Operating Conditions

- 3A. The Applicant must:
  - (a) take all reasonable steps to minimise noise from construction and operational activities, including low frequency noise and other audible characteristics, associated with the development;
  - (b) implement reasonable and feasible noise attenuation measures on all plant and equipment that will operate in noise sensitive areas;
  - (c) operate a comprehensive noise management system commensurate with the risk of impact;
  - (d) take all reasonable steps to minimise the noise impacts of the development during noise-enhancing meteorological conditions when the noise criteria in this consent do not apply (see NPfI);
  - (e) carry out regular attended noise monitoring (at least once a month, unless otherwise agreed by the Planning Secretary) to determine whether the development is complying with the relevant conditions of this consent;

- (f) regularly assess the noise monitoring data and modify or stop operations on the site to ensure compliance with the relevant conditions of this consent; and
  - (g) implement reasonable and feasible measures to further enclose the structure housing the coal crusher in order to further mitigate noise from operational activities.
- 3B. The Applicant must decommission the surface rotary breaker identified in the Statement of Commitments at Appendix 3, within 3 months of approval of Modification 5.

#### Noise Management Plan

- 3C. The Applicant must prepare a Noise Management Plan for the development to the satisfaction of the Planning Secretary. This plan must:
- (a) be prepared by a suitably qualified and experienced person/s whose appointment has been endorsed by the Planning Secretary;
  - (b) describe the measures to be implemented to ensure:
    - i. compliance with the noise criteria and operating conditions in this consent;
    - ii. best practice management is being employed; and
    - iii. noise impacts of the development are minimised during noise-enhancing meteorological conditions when the noise criteria in this consent do not apply (see NPfI);
  - (c) describe the noise management system in detail; and
  - (d) include a monitoring program that:
    - i. uses a combination of real-time and supplementary attended monitoring to evaluate the performance of the development;
    - ii. monitors noise at the nearest and/or most affected residences;
    - iii. includes a program to calibrate and validate the real-time noise monitoring results with the attended monitoring results over time;
    - iv. adequately supports the noise management system;
    - v. includes a protocol for distinguishing noise emissions of the development from any neighbouring developments; and
    - vi. includes a protocol for identifying any noise-related exceedance, incident or non-compliance and for notifying the Department and relevant stakeholders of any such event.

The Applicant must implement the Noise Management Plan as approved by the Planning Secretary.

#### SUBSIDENCE

4. The Applicant must limit its coal extraction methods on the site to first workings only, and must not undertake second workings.
5. Deleted.

#### SOIL AND WATER

##### Discharge

6. The Applicant must only discharge water from the site as expressly provided for by its EPL.
7. The Applicant must investigate, assess and report on the ecological interactions of minewater discharged from the site with the aquatic ecology of the unnamed creek and wetlands (and associated vegetation) between the minewater discharge point/s and Lake Macquarie. This report must:
- (a) be prepared in consultation with EPA by suitably qualified expert/s whose appointment/s have been approved by the Planning Secretary;
  - (b) be submitted to the Planning Secretary by the end of March 2009; and
  - (c) assess the probable alterations in the local ecology attributable to previous and proposed minewater discharges and any future cessation of minewater discharge flows.

#### Water Management Plan

8. The Applicant must prepare a Water Management Plan for the development to the satisfaction of the Planning Secretary. This plan must:
- (a) be prepared in consultation with DPIE Water by suitably qualified expert/s whose appointment/s have been approved by the Planning Secretary;
  - (b) be submitted to the Planning Secretary by the end of March 2009; and
  - (c) include a:
    - Site Water Balance;

# Environment Protection Licence

Licence - 191

- L4.1 The licensee must not cause, permit or allow any waste to be received at the premises, except the wastes expressly referred to in the column titled "Waste" and meeting the definition, if any, in the column titled "Description" in the table below.

Any waste received at the premises must only be used for the activities referred to in relation to that waste in the column titled "Activity" in the table below.

Any waste received at the premises is subject to those limits or conditions, if any, referred to in relation to that waste contained in the column titled "Other Limits" in the table below.

This condition does not limit any other conditions in this licence.

Code	Waste	Description	Activity	Other Limits
NA	Waste	Any other waste received on the premises for storage, treatment, processing, sorting or disposal and which receipt is not a scheduled activity under Schedule 1 of the POEO Act, as in force from time to time.		
NA	General or Specific exempted waste	Waste that meets all the conditions of a resource recovery exemption under Clause 51A of the Protection of the Environment Operations (Waste) Regulation 2014	As specified in each particular resource recovery exemption	N/A

- L4.2 The licensee must not cause, permit or allow any waste generated outside the premises to be received at the premises for storage, treatment, processing, reprocessing or disposal or any waste generated at the premises to be disposed of at the premises, except as expressly permitted by the licence.
- L4.3 This condition only applies to the storage, treatment, processing, reprocessing or disposal of waste at the premises if it requires an environment protection licence.

## L5 Noise limits

Note: Noise limits are not specified as a condition of this licence. Noise limits are prescribed with the conditions of Project Approval 06\_0311 granted under the *Environmental Planning and Assessment Act 1979*. Under the *Environmental Planning and Assessment Act 1979* the Department of Planning is the appropriate authority in respect of the administration and regulation of the Project Approval.

## 4 Operating Conditions

### O1 Activities must be carried out in a competent manner

- O1.1 Licensed activities must be carried out in a competent manner.

The above noise monitoring locations are representative of residential receivers most likely to be affected by CVC operational noise. Adherence with the relevant noise criteria at these locations will indicate that noise criteria will be met at other surrounding noise-sensitive locations.

#### 4.2.3 Manning Colliery

Consistent with the Noise Impact Assessment (EMM 2019) undertaken as part of the Project Approval MP06\_0311 MOD 5, rural and residential receivers have been divided into three (3) receiver areas (RA's) with similar geographical and acoustic features. The following points are considered representative of each receiver area:

- RA1, rural residential properties south of MC and fronting the Pacific Highway. The dominant noise source in this area is road traffic. Birds, insects and other industrial sources are also audible at times.
- RA2, privately-owned relocatable residences within the MSHV, east of MC. The dominant noise sources in this RA are birds, insects, traffic and other industrial sources. Activities at MC are also noted to be audible at times.
- RA3, various rural residential residences on Tall Timbers Road at Kingfisher Shores and adjacent to the Chain Valley Bay suburban area. The dominant noise sources in this RA are birds, insects, other industrial sources and traffic movements. Activities at MC are also noted to be audible at times.

The attended noise monitoring locations for MC and relevant noise criteria are identified below in **Table 6**.

**Table 6: Noise Monitoring Locations and Limits for Manning Colliery**

<b>Location</b>	<b>Receivers Represented MP06_0311 ID</b>	<b>Coordinates</b>	<b>Day <i>L<sub>Aeq</sub>(15 min)</i> dB (A)</b>	<b>Evening <i>L<sub>Aeq</sub>(15 min)</i> dB (A)</b>	<b>Night <i>L<sub>Aeq</sub>(15 min)</i> dB (A)</b>	<b>Night <i>L<sub>A1</sub>(1 min)</i> dB (A)</b>
RA1	4, 5, 6	364646E 6327221N	40	36	36	46
RA2	7, 8	365164E 6328332N	40	40	40	45
RA3	9, 11, 18, 20	365069E 6328953N	40	39	39	49

The above noise monitoring locations are representative of residential receivers most likely to be affected by MC operational noise. Adherence with the relevant noise criteria at these locations will indicate that noise criteria will be met at other surrounding noise-sensitive locations.

<b>Review Date</b>	<b>Next Review Date</b>	<b>Revision No</b>	<b>Document Owner</b>	<b>Page</b>
20/04/2022	20/04/2025	1	Environmental Compliance Coordinator	Page 28 of 89
<b>DOCUMENT UNCONTROLLED WHEN PRINTED</b>				

---

## Appendix C

### Calibration certificates

---

# CERTIFICATE OF CALIBRATION

CERTIFICATE No: **C33872**

EQUIPMENT TESTED : Sound Level Calibrator

Manufacturer: Svantek

Type No: SV-36 Serial No: 79952

Owner: EMM Consulting Pty Ltd  
L3, 175 Scott Street  
Newcastle, NSW 2300

Tests Performed: Measured Output Pressure level, Frequency & Distortion

Comments: See Details overleaf. All Test Passed.

Parameter	Pre-Adj	Adj Y/N	Output: (dB re 20 $\mu$ Pa)	Frequency (Hz)	THD&N (%)
Level1:	NA	N	94.09 dB	1000.00 Hz	1.12 %
Level2:	NA	N	114.06 dB	1000.00 Hz	0.71 %
Uncertainty			$\pm 0.11$ dB	$\pm 0.05\%$	$\pm 0.20$ %
Uncertainty (at 95% c.i.) k=2					

## CONDITION OF TEST:

Ambient Pressure 1004 hPa  $\pm 1$  hPa  
Temperature 23  $^{\circ}\text{C} \pm 1^{\circ}\text{C}$   
Relative Humidity 55 %  $\pm 5\%$

Date of Receipt : 26/09/2022  
Date of Calibration : 29/09/2022  
Date of Issue : 29/09/2022

Acu-Vib Test AVP02 (Calibrators)

Procedure: Test Method: AS IEC 60942 - 2017

CHECKED BY:

AUTHORISED  
SIGNATURE:

  
Hein Soe

Accredited for compliance with ISO/IEC 17025 - Calibration

Results of the tests, calibration and/or measurements included in this document are traceable to SI units through reference equipment that has been calibrated by the Australian National Measurement Institute or other NATA accredited laboratories demonstrating traceability.

This report applies only to the item identified in the report and may not be reproduced in part.

The uncertainties quoted are calculated in accordance with the methods of the ISO Guide to the Uncertainty of Measurement and quoted at a coverage factor of 2 with a confidence interval of approximately 95%.



WORLD RECOGNISED  
ACCREDITATION

Accredited Lab No. 9262  
Acoustic and Vibration  
Measurements

**Acu-Vib Electronics**  
CALIBRATIONS SALES RENTALS REPAIRS

Head Office & Calibration Laboratory  
Unit 14, 22 Hudson Ave. Castle Hill NSW 2154  
(02) 9680 8133  
www.acu-vib.com.au



# CERTIFICATE OF CALIBRATION

CERTIFICATE No: **SLM31670**

EQUIPMENT TESTED: Sound Level Meter

Manufacturer: B & K  
Type No: 2250  
Mic. Type: 4189  
Pre-Amp. Type: ZC0032

Serial No: 2759405  
Serial No: 2983733  
Serial No: 22666

Filter Type: 1/3 Octave

Test No: F031671

Owner: EMM Consulting  
Level 3, 175 Scott Street  
Newcastle, NSW 2300

Tests Performed: IEC 61672-3:2013 & IEC 61260-3:2016

Comments: All Test passed for Class 1. (See overleaf for details)

## CONDITIONS OF TEST:

Ambient Pressure 992 hPa  $\pm 1$  hPa  
Temperature 26  $^{\circ}\text{C} \pm 1^{\circ}\text{C}$   
Relative Humidity 48 %  $\pm 5\%$

Date of Receipt: 02/02/2022  
Date of Calibration: 02/02/2022  
Date of Issue: 03/02/2022

Acu-Vib Test Procedure: AVP10 (SLM) & AVP06 (Filters)

CHECKED BY: .....

AUTHORISED SIGNATURE: .....

*Jack Kieft*

Accredited for compliance with ISO/IEC 17025 - Calibration

Results of the tests, calibration and/or measurements included in this document are traceable to SI units through reference equipment that has been calibrated by the Australian National Measurement Institute or other NATA accredited laboratories demonstrating traceability.

This report applies only to the item identified in the report and may not be reproduced in part.

The uncertainties quoted are calculated in accordance with the methods of the ISO Guide to the Uncertainty of Measurement and quoted at a coverage factor of 2 with a confidence interval of approximately 95%.



WORLD RECOGNISED  
ACCREDITATION

Accredited Lab No. 9262  
Acoustic and Vibration  
Measurements

**Acu-Vib Electronics**  
CALIBRATIONS SALES RENTALS REPAIRS

Head Office & Calibration Laboratory  
Unit 14, 22 Hudson Ave. Castle Hill NSW 2154  
(02) 9680 8133  
[www.acu-vib.com.au](http://www.acu-vib.com.au)



## **Australia**

### **SYDNEY**

Ground floor 20 Chandos Street  
St Leonards NSW 2065  
T 02 9493 9500

### **NEWCASTLE**

Level 3 175 Scott Street  
Newcastle NSW 2300  
T 02 4907 4800

### **BRISBANE**

Level 1 87 Wickham Terrace  
Spring Hill QLD 4000  
T 07 3648 1200

### **CANBERRA**

Suite 2.04 Level 2  
15 London Circuit  
Canberra City ACT 2601

### **ADELAIDE**

Level 4 74 Pirie Street  
Adelaide SA 5000  
T 08 8232 2253

### **MELBOURNE**

Suite 8.03 Level 8  
454 Collins Street  
Melbourne VIC 3000  
T 03 9993 1900

### **PERTH**

Suite 9.02 Level 9  
109 St Georges Terrace  
Perth WA 6000  
T 08 6430 4800

## **Canada**

### **TORONTO**

2345 Yonge Street Suite 300  
Toronto ON M4P 2E5  
T 647 467 1605

### **VANCOUVER**

60 W 6th Ave  
Vancouver BC V5Y 1K1  
T 604 999 8297



[linkedin.com/company/emm-consulting-pty-limited](https://www.linkedin.com/company/emm-consulting-pty-limited)



[emmconsulting.com.au](http://emmconsulting.com.au)